

POWERWALL

Tesla Powerwall is a fully-integrated AC battery system for residential or light commercial use. Its rechargeable lithium-ion battery pack provides energy storage for solar self-consumption and time-based control.

Powerwall's electrical interface provides a simple connection to any home or building. Its revolutionary compact design achieves market-leading energy density and is easy to install, enabling owners to quickly realise the benefits of reliable, clean power.



PERFORMANCE SPECIFICATIONS

AC Voltage (Nominal)	230 V
Feed-In Type	Single Phase
Grid Frequency	50 Hz
Total Energy ¹	14 kWh
Usable Energy ¹	13.5 kWh
Grid Standards (UK)	G98 / G99
Real Power, max continuous	3.68 kW / 5 kW (charge and discharge)
Apparent Power, max continuous	3.68 kVA / 5 kW (charge and discharge)
Power Factor Output Range	+/- 1.0 adjustable
Power Factor Range (full-rated power)	+/- 0.85
Internal Battery DC Voltage	50 V
Round Trip Efficiency ^{1,2}	90%
Warranty	10 years


¹Values provided for 25°C, 3.3 kW charge/discharge power.

²AC to battery to AC, at beginning of life.

MECHANICAL SPECIFICATIONS

Dimensions	1150 mm x 753 mm x 147 mm
Weight	114 kg
Mounting options	Floor or wall mount

¹Dimensions and weight differ slightly if manufactured before March 2019. Contact Tesla for additional information.

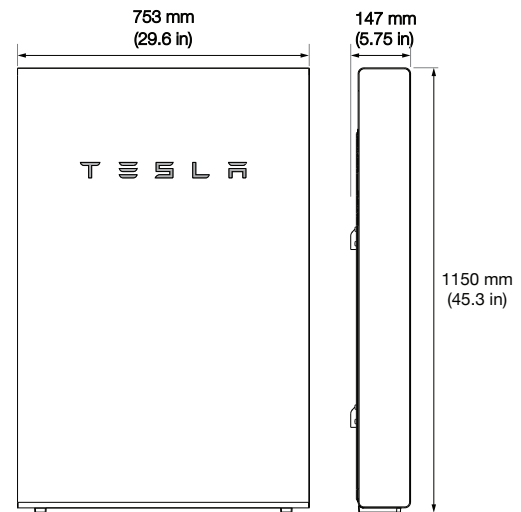

COMPLIANCE INFORMATION

Certifications	IEC 62109-1, IEC 62109-2, IEC 62619, UN 38.3
Grid Connection	Worldwide Compatibility
Emissions	IEC 61000-6-1, IEC 61000-6-3
Environmental	RoHS Directive 2011/65/EU, WEEE Directive 2012/19/EU, Battery Directive 2006/66/EC, REACH Regulation
Seismic	AC156, IEEE 693-2005 (high)

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-20°C to 50°C
Optimum Temperature	0°C to 30°C
Operating Humidity (RH)	Up to 100%, condensing
Maximum Elevation	3000 m
Environment	Indoor and outdoor rated
Ingress Rating	IP67 (Battery & Power Electronics) IP56 (Wiring Compartment)
Noise Level @ 1m	< 40 dBA at 30°C

TYPICAL SYSTEM LAYOUT

